


LODESTONE PACIFIC



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

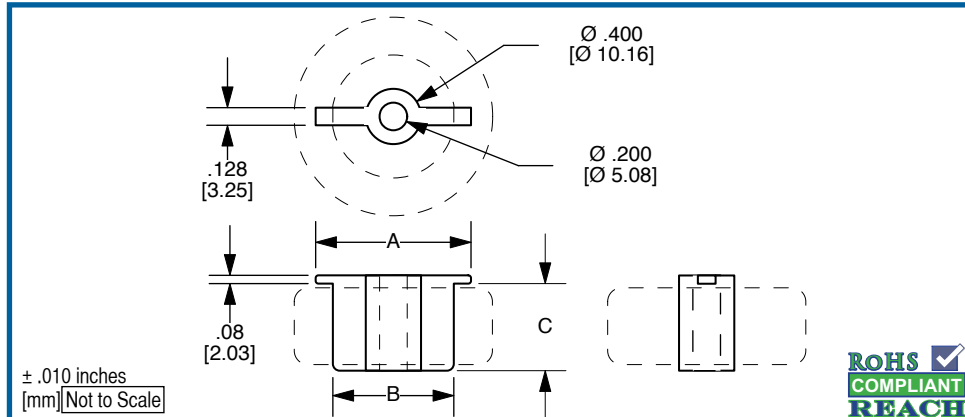

HTS SERIES

Material: GFN (Natural)
UL Rating: UL94-VO, Class F
Package Method: Bulk in Polybags
Application: These horizontal spacers are for common mode chokes requiring voltage isolation. The hole through the center will allow a 10-32 bolt to secure the coil to a PCB, chassis, or to horizontal mounting platforms TM1850 and TM2300 (page 44) or XM Series (page 42).

M185: Nylon #10 hex nut
M187: Nylon 10-32 x 1.5 inch bolt
 (Sold separately)

Made in our China Factory

Part No.	A	B	C	DIA.	HOLE	BOLT SIZE
HTS89-07	1.125 [28.6]	.880 [22.3]	.485 [12.3]	.400 [10.2]	.200 [5.1]	10-32
HTS73-01	1.020 [25.9]	.715 [18.2]	.900 [22.9]	.400 [10.2]	.200 [5.1]	10-32
HTS130-10	1.750 [44.5]	.525 [13.3]	.525 [13.3]	.400 [10.2]	.200 [5.1]	10-32

Get Samples
 Request samples and literature and have them ship to you same day.
www.lodestonepacific.com/samplepricing.php

Check Inventory
 View daily updated inventory levels in USA and Hong Kong warehouses.
www.lodestonepacific.com/search.php

Request a Quote
 Request a quote and delivery and have it e-mailed to you same day.
www.lodestonepacific.com/quote.php

Try Me!
Toroid Mount Selector
 Search for a part to match your applications, download the .pdf
www.lodestonepacific.com/selectoroid.php

NEW!
REACH Docs Database
 Search for REACH documents, view or download the certifications .pdf.
www.lodestonepacific.com/reach.php

NEW!
Find a Coil Winder
 Search our Coil Winder Data Base, for capabilities to match your specs.
www.lodestonepacific.com/coilwinders.php