




Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

STM37CS-06

Material: PPS (Black)
UL Rating: UL94-VO, Class F
6 Terminals: Self Terminating
Package Method: Bulk in Poly Bags
 See RoHS compliant PVC packaging trays, or tape and reel options on page 57.
Application: For surface mount transformers or current sensors. For toroids up to .400 inches in diameter and uses the toroid's winding leads to surface mount the toroid and case to the PCB. Use #34 AWG (.006) in termination positions 5 & 6, and #24 AWG (.020) in positions 1,2,3 & 4. This product is the patented concept of Pulse Engineering Inc.

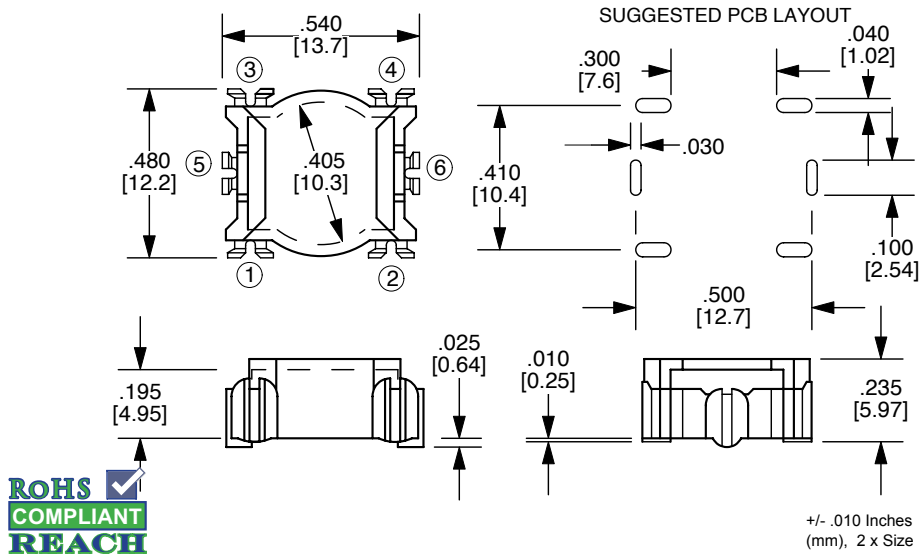

Get Samples

Request samples and literature and have them ship to you same day.
www.lodestonepacific.com/samplepricing.php

Check Inventory

View daily updated inventory levels in USA and Hong Kong warehouses.
www.lodestonepacific.com/search.php

Request a Quote

Request a quote and delivery and have it e-mailed to you same day.
www.lodestonepacific.com/quote.php

Try Me! Toroid Mount Selector

Search for a part to match your applications, download the .pdf
www.lodestonepacific.com/selectoroid.php

NEW! REACH Docs Database

Search for REACH documents, view or download the certifications .pdf.
www.lodestonepacific.com/reach.php

NEW! Find a Coil Winder

Search our Coil Winder Data Base, for capabilities to match your specs.
www.lodestonepacific.com/coilwinders.php