


LODESTONE PACIFIC



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

NEW

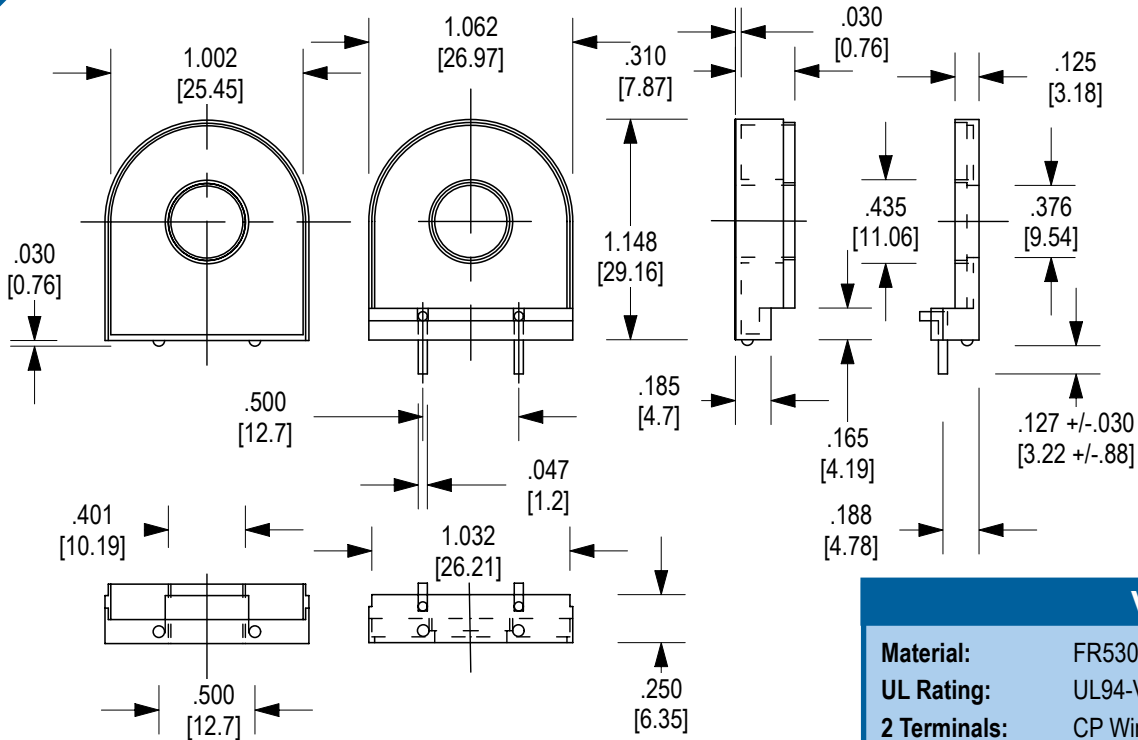

VTM980-2

Material: FR530 (Black)
UL Rating: UL94-VO, Class F
2 Terminals: CP Wire
 .030 (.8mm) diameter. 100% Tin Plate.
Solderability: Per MIL-STD-202 Method 208
Packaging Tray: Bulk in Polybags. Will fit tray TY122X140, see page 65.
Application: For vertical mounting of wound toroids up to .98 inches in diameter for current sensing applications. Includes cover PC980
 Made in our China Factory

± .010 inches
 [mm] Actual Size

Get Samples
 Request samples and literature and have them ship to you same day.
www.lodestonepacific.com/samplepricing.php

Check Inventory
 View daily updated inventory levels in USA and Hong Kong warehouses.
www.lodestonepacific.com/search.php

Request a Quote
 Request a quote and delivery and have it e-mailed to you same day.
www.lodestonepacific.com/quote.php

Try Me!
Toroid Mount Selector
 Search for a part to match your applications, download the .pdf
www.lodestonepacific.com/selectoroid.php

NEW!
REACH Docs Database
 Search for REACH documents, view or download the certifications .pdf.
www.lodestonepacific.com/reach.php

NEW!
Find a Coil Winder
 Search our Coil Winder Data Base, for capabilities to match your specs.
www.lodestonepacific.com/coilwinders.php