

LODESTONE PACIFIC




Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com

STM270-06

Material: LCP (Natural)
UL Rating: UL94-VO, Class F
6 Terminals: Self Terminating
Package Method: Bulk in Poly Bags
See RoHS compliant PVC packaging trays, or tape and reel options on page 57.
Application: For surface mounting of toroids with wound diameters up to .260 and a max height of .070 inches. The toroid leads are tinned, and wrapped around the tabs on the toroid mount. The toroid leads then make a direct connection to the PCB during infrared solder reflow.

Made in our China Factory

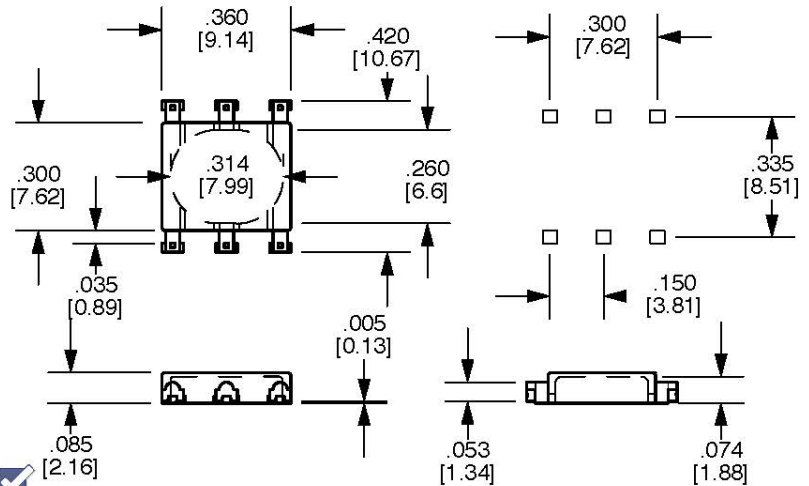

+/- .010 Inches
(mm), 2 x Size

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)