


LODESTONE PACIFIC



Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com

NEW

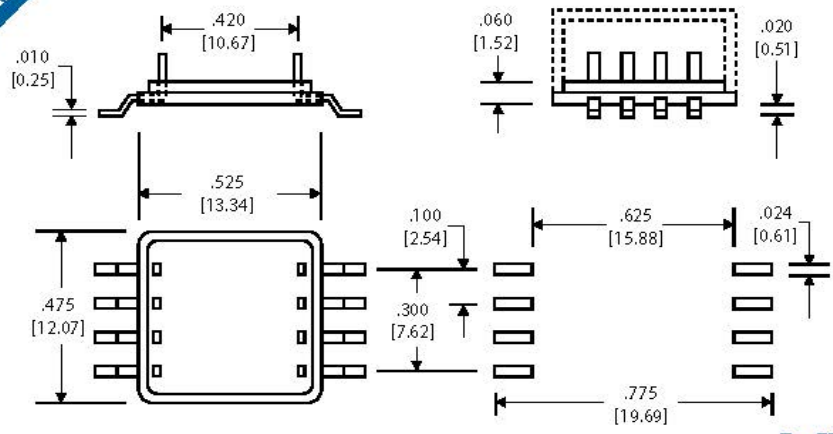

STM391-8

Material: DAP4 (Black)
UL Rating: UL94-V0, Class F
8 Terminals: Phosphorus Bronze
.020 (5mm) x .010 (25mm), 100% Tin Plate.
Solderability: MIL-STD-202
Method 208

Package Tray (HIPS): TY65x100-B (75/Tray)
See RoHS compliant PVC packaging trays options on page 57.

Application: For surface mounting of components and wound toroids up to .390 inches in diameter. Encapsulation cover PC390 is available on page 33. STM390-8 with Alloy 42 terminals is still available.

Made in our China factory

+/- .010 Inches
(mm), 2 x Size



[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)