


LODESTONE PACIFIC



Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com

STM403-04/190

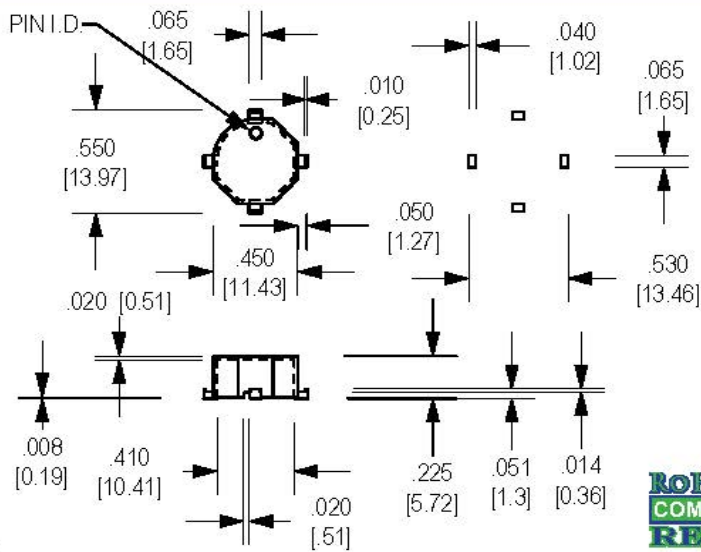

+/- .010 Inches
(mm), Actual Size



Material: LCP (Natural)
UL Rating: UL94-V0, Class N
4 Terminals: Self Terminating
Package Method: Bulk in Poly Bags
See RoHS compliant PVC packaging trays on page 57.
Application: For surface mounting toroids with wound diameters up to .403 inches and .190 inches in height. The toroid leads are tinned, then wrapped around the tabs on the toroid mount. The toroid's leads then make direct contact to the PCB. Ideal for automatic pick and place.

Made in our China factory

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)