


LODESTONE PACIFIC



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

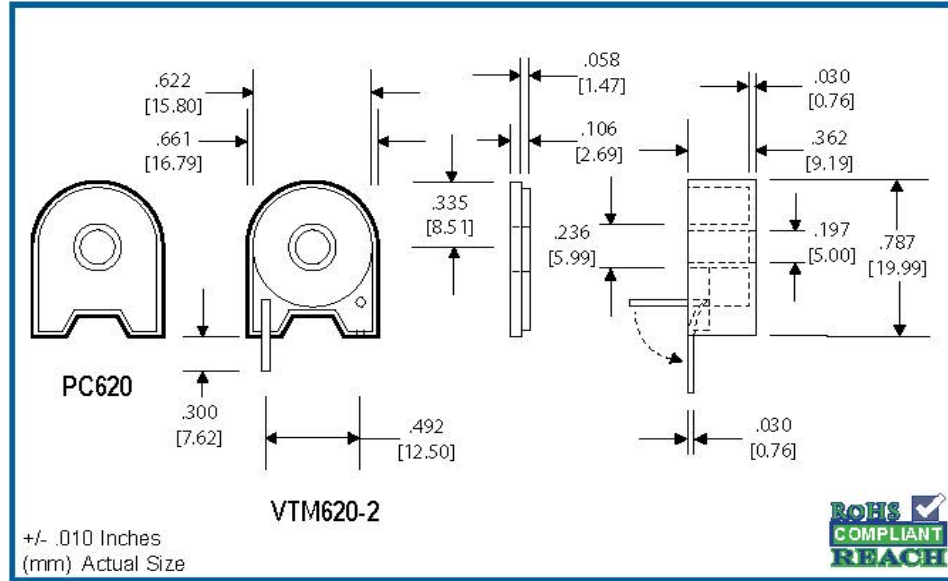

VTM620-2

Material: PBT (Black)
UL Rating: UL94-V0, Class F
2 Terminals: CP Wire
 100% Tin Plate
Solderability: Per MIL-STD-202
 Method 208
Package Method: Bulk in Poly Bags
 See RoHS compliant PVC packaging trays,
 on page 57.
Application: For vertical mounted inductors
 or current sensors. Terminals are shipped in
 the horizontal position to facilitate toroid lead
 connection. Terminals are then moved to the
 vertical position for circuit board insertion. Op-
 tional snap-on cover PC620 is available.

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)