

LODESTONE PACIFIC




Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

TS SERIES

Material: GFN (Natural)
UL Rating: UL94-VO, Class F
Packaging: Bulk in Polybags
Application: Spacers are for common mode chokes requiring voltage isolation.

| Part No. | A | B | C |
|----------|--------------|--------------|-------------|
| TS33-13 | .460 [11.7] | .315 [8.0] | .285 [7.2] |
| TS48-12 | .660 [16.7] | .465 [11.8] | .365 [9.3] |
| TS52-03 | .660 [16.7] | .490 [12.2] | .412 [10.5] |
| TS52-05 | .660 [16.7] | .510 [12.9] | .600 [15.2] |
| TS59-06 | .730 [18.5] | .560 [14.2] | .412 [10.5] |
| TS73-01 | .930 [23.6] | .720 [18.2] | .700 [17.8] |
| TS73-11 | .930 [23.6] | .722 [18.3] | .430 [10.9] |
| TS89-07 | 1.025 [26.0] | .875 [22.2] | .690 [17.5] |
| TS94-14 | 1.030 [26.1] | .930 [23.6] | .670 [17.0] |
| TS130-10 | 1.460 [37.1] | 1.290 [32.8] | .740 [18.8] |
| TS140-08 | 1.372 [34.8] | 1.212 [30.8] | .875 [22.2] |

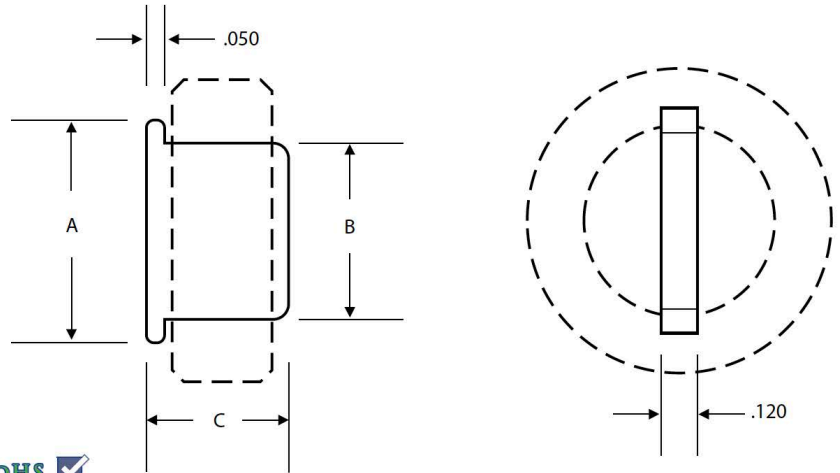

± .010 inches
 [mm] Not to Scale

Request a Sample

View Inventory

Request a Quote

Toroid Mount Selector

REACH Database

Coil Winder Database